


IP65
51.2V 280Ah 14.34kWh

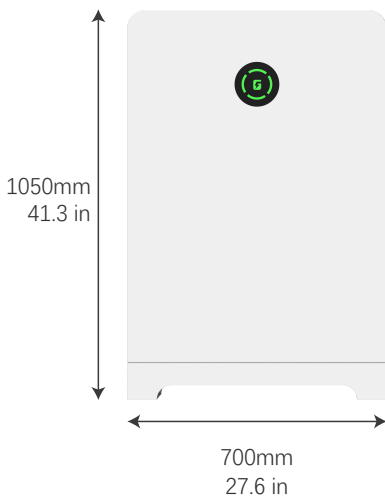

✓ Long life and safety

Vertical industry integration ensures more than 8500 cycles with 80% DoD.
Safe Lithium iron phosphate battery cell.

✓ Intelligent

Each battery with independent BMS system manages power output smartly and effectively.

✓ Modularization

Modular design gives the end customers the power of choice Deliver up to 229KW with single max module (14.34KWh) at 16pcs parallel connection.

✓ Easy to install and use

Just plug and play to minimize the installation time and cost.
Compact and fashionable design fits in your sweet home environment.

✓ Compatibility

Compatible with most of the available Hybrid inverters.

✓ Safety Cert

UL1973, UL9540A, UL9540, CB-IEC62619, CE-EMC, UN38.3, MSDS

Battery Specifications

Model No

GSL051280A-B-GBP2F

Nominal Parameters

Battery Chemistry

LiFePO4

Voltage

51.2V

Operating Voltage

46-56V

Capacity

280Ah

Energy

14.34Kwh

Scalability

Max.16pcs in parallel (229kWh)

Recomend Discharge Energy (80% DOD)

13.10Kwh

Charge/Discharge
Current

Recommend

100A

Max.

150A

Peak(2mins,25°C)

200A

Basic Parameters

Recommend Depth of Discharge

90%

Dimension (W/H/D)

700*1050*200mm / 27.6*41.3*7.9 in

Weight Approximate

128.5kgs / 283 lbs

Master LED Indicator

4 LED (SOC:25%~100%)

2 LED (working, alarming, protecting)

IP Rating of Enclosur

IP65

Working Temperature

Charge:0°C ~ 55°C Discharge:-20°C ~ 55°C

Storage Temperature

0°C ~ 35°C

Humidity

5%~95%

Altitude

≤2000m

Cycle Life
(25±2°C,0.5C/0.5C,80%EOL)

≥8500

Installation

Ground/Outdoor

Communication Port

CAN2.0, RS485, WiFi

Warranty Period [3]

15 years

Certification

UL1973, UL9540A, UL9540, CB-IEC62619,
CE-EMC, UN38.3, MSDS